



KAKO DODATI DODATNO  
ZUNANJO ENOTO V  
HIKVISION DOMOFONSKI  
SISTEM

***HIKVISION***


# 1. Dodajanje enote

1.1. »Inicializirajte« dodatno zunanjo enoto.

1.2. Vpišite se v spletni vmesnik **glavne zunanje enote**. Kliknite na »**Device Management**«, »**Add**«.

1.3 Odpre se vam novo pogovorno okno, vnesite zahtevane podatke in pritisnite OK.

- **Device Type:** Sub Door Station
- **User Name:** admin
- **Password:** geslo dodatne zunanje enote
- **Registration Password:** geslo dodatne zunanje enote
- **Serial No.:** serijska številka dodatne zunanje enote
- **Floor No.:** številka nadstropja
- **No.:** številka dodatne zunanje enote
- **IP Adress:** IP naslov dodatne zunanje enote
- **IPv4 Subnet Mask:** maska dodatne zunanje enote
- **IPv4 Default Gateway:** prehod dodatne zunanje enote
- **Port:** 8000

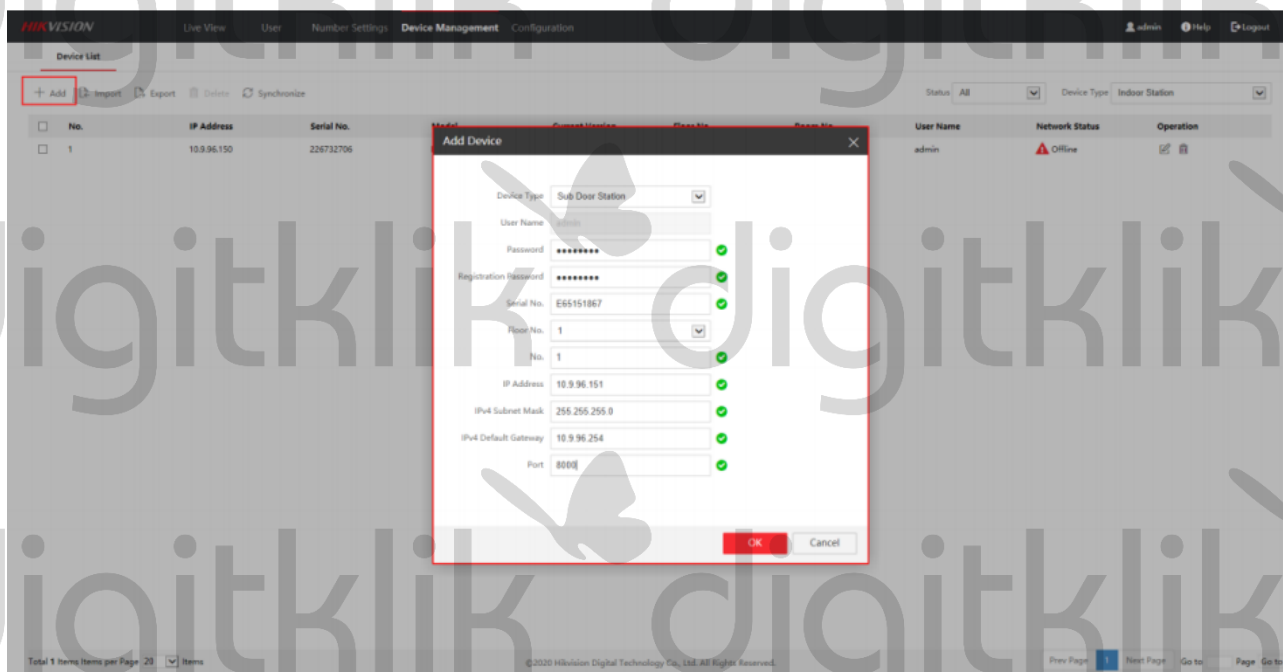

1.4. Ko končate z dodajanje dodatne zunanje enote, se vam na ekranu pojavi dodana naprava.



The screenshot shows the Hikvision Device Management interface. At the top, there is a navigation bar with 'Device Management' selected. Below it, a 'Device List' table is displayed. The table has columns for 'No.', 'IP Address', 'Serial No.', 'Model', 'Current Version', 'Floor No.', 'No.', 'User Name', 'Network Status', and 'Operation'. A single device is listed with 'Network Status' set to 'Offline', which is highlighted with a red box.

| No. | IP Address  | Serial No. | Model | Current Version | Floor No. | No. | User Name | Network Status | Operation |
|-----|-------------|------------|-------|-----------------|-----------|-----|-----------|----------------|-----------|
| 1   | 10.0.96.151 | 65151867   |       |                 | 1         | 1   | admin     | Offline        |           |

1.5. Povezovanje dodatne zunanje enote traja med 5-10min. Če so podatki pravilno vneseni se izpiše v razpredelnici pod »Network Status«, »Online« (povezano).



The screenshot shows the Hikvision Device Management interface. The 'Device List' table now shows the device with 'Network Status' set to 'Online', which is highlighted with a red box.

| No. | IP Address  | Serial No. | Model             | Current Version     | Floor No. | No. | User Name | Network Status | Operation |
|-----|-------------|------------|-------------------|---------------------|-----------|-----|-----------|----------------|-----------|
| 1   | 10.0.96.151 | 65151867   | DS-KV8413-WME1(B) | V2.2.3 build 200805 | 1         | 1   | admin     | Online         |           |