



DODAJANJE KAMERE NA NOTRANJO POLICE tech ENOTO




1. Nastavitve IP kamere

1.1. Vpišite se v spletni vmesnik od kamere.


1.2. V spletnem vmesniku, kliknite na »Setting«, »Camera«, »Video«, »Video«.

- Omogočite »Sub Stream«,
- »Encode mode« izberite »H264«,
- »Resolution« izberite »VGA« ali **640x480**,
- nastavitve shranite s pritiskom na gumb »Save«.

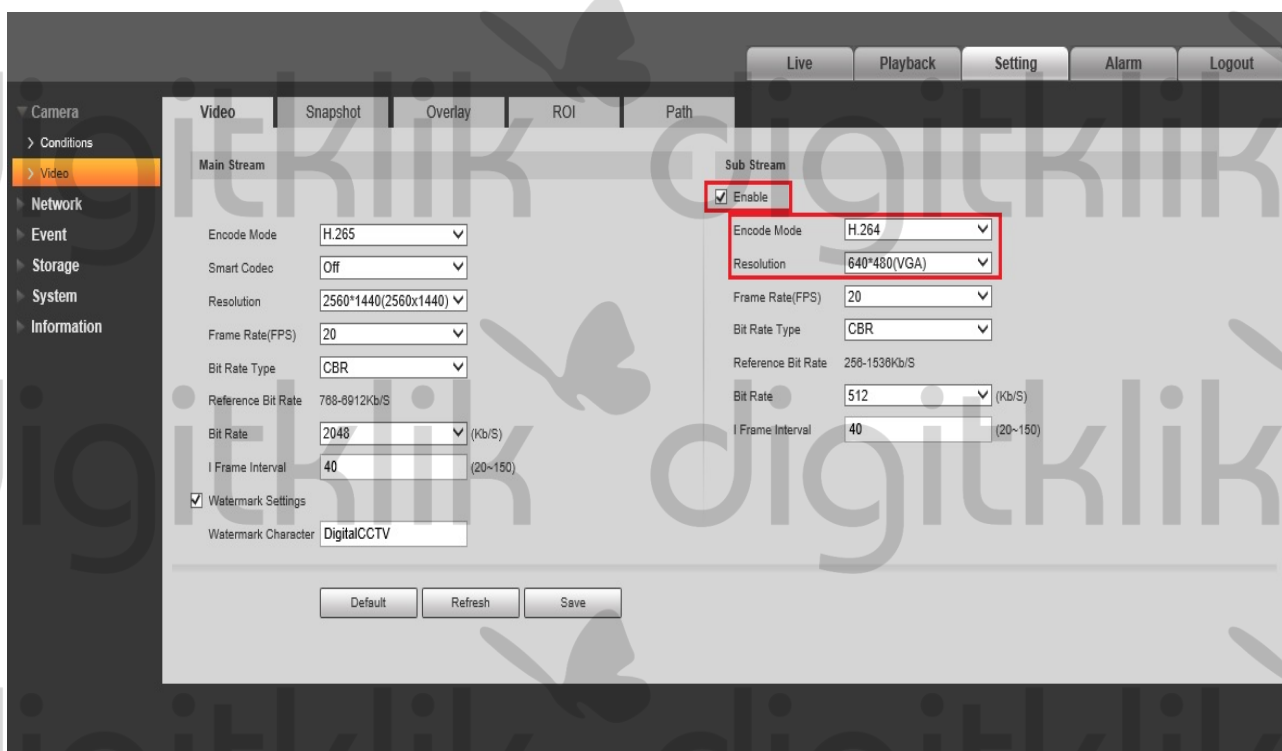

2. Dodajanje kamere v notranjo enoto

2.1. Na notranji enoti, kliknite na »Monitor«, »IPC«, »+ Add«.

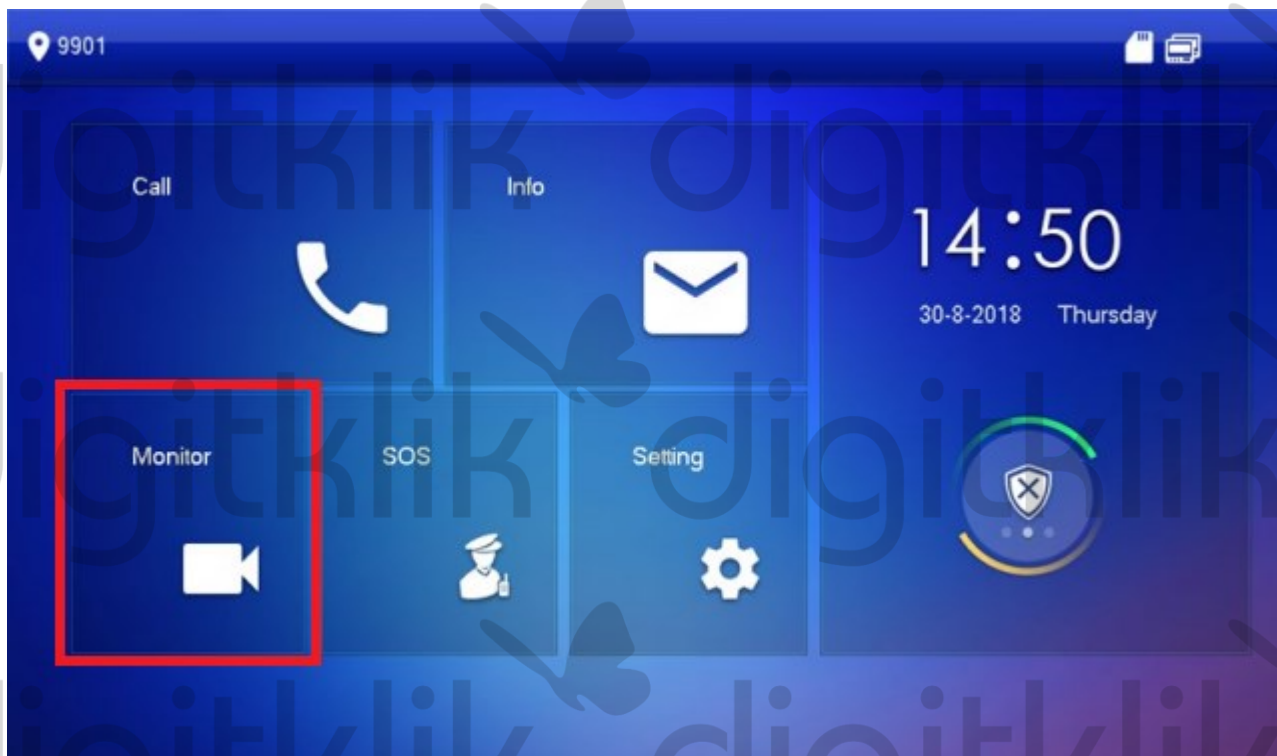

2.2. Izberite »IPC«, ter kliknite »+ Add«.



2.3. Odpre se okno v katerega vnesete podatke:

- **IPC name:** poljubno ime kamere
- **IP:** IP naslov kamere
- **User Name:** admin
- **Password:** geslo kamere, ki jo želite dodati
- **Port:** 554
- **Stream:** Extra (dodatni)
- **Protocol:** Local
- **Channel:** 1 (izberite **IPC**)

Na koncu potrdite s klikom na **OK**.

The screenshot shows a mobile application interface with a blue sidebar on the left containing icons for 'Door', 'IPC', and 'Favorite'. The main screen displays a dialog box titled 'IPC' with the subtitle 'AddIPC_32'. The dialog contains the following fields and values:

IPC32 Name	001
IP	10 172 222 25
User Name	admin
Password	•••••
Port	554
Stream	Extra
Protocol	Local
Channel	1

At the bottom of the dialog, there are 'Cancel' and 'OK' buttons. A blue button labeled 'IPC' is positioned to the right of the 'Channel' field.