



INICIALIZACIJA Police Tech H-LINE ENOT




1. Inicializacija H-Line enot

1.1. Za pomoč pri nastavitvi enote uporabite program »**SADPTool**«.

Povezava do programa: <https://www.hikvision.com/en/support/tools/desktop-tools/sadp-forwindows>

1.2. Napravi zagotovite napajanje, ter jo priklopite v omrežje.


1.3. Preko programa **SADPTool**, s kljukico izberite enoto, vnesite novo geslo, ter kliknite na gumb »**Activate**«.

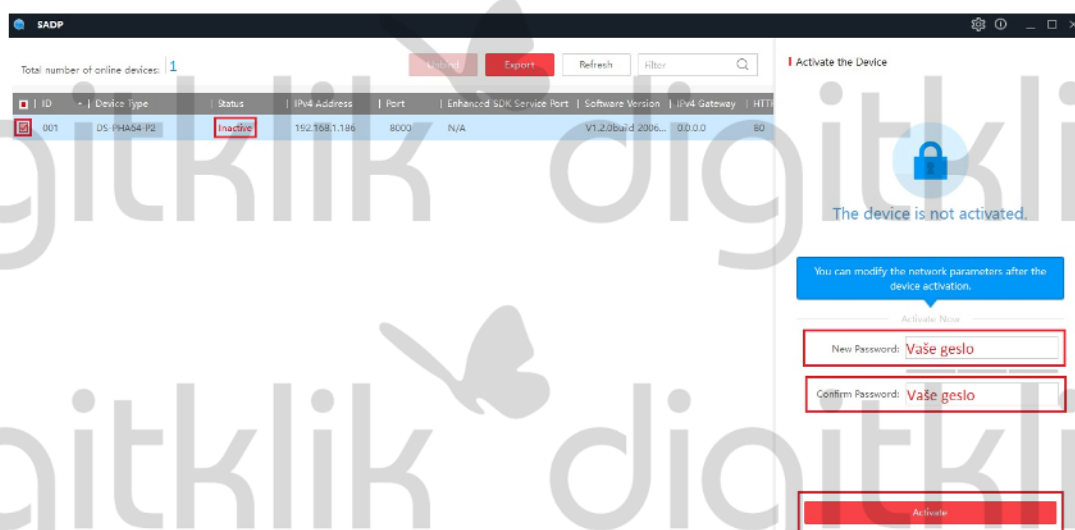

1.4. S kljukico označite enoto, ter ji vnesite nov **IP naslov, masko**, ter prehod.



1.5. Ko je naprava »aktivirana«, lahko dostopate do nje preko spletnega vmesnika. Dvakrat kliknite na njen IP naslov. Za vstop v meni, pod »username« vpišite »admin«, pod »password« vpišite geslo, ki ste ga nastavili pod točko 1.3.

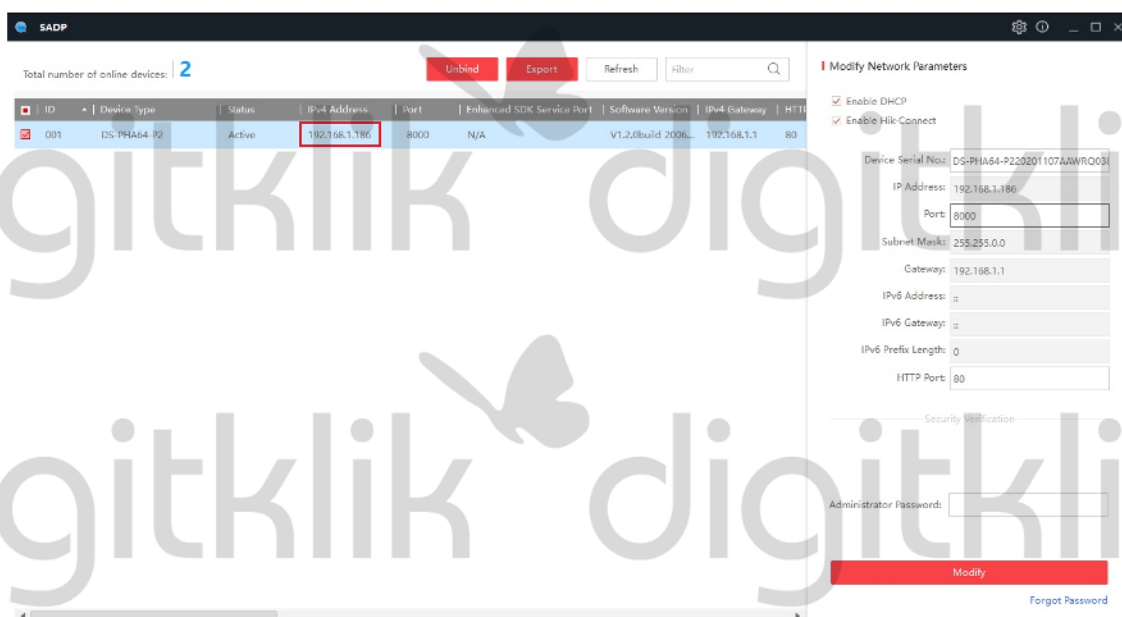

The screenshot shows the SADP web interface. At the top, it indicates 'Total number of online devices: 2'. Below this is a table with columns: ID, Device Type, Status, IPv4 Address, Port, Enhanced SDE Service Port, Software Version, IPv4 Gateway, and HTTP Port. The first row is selected, with its IP address '192.168.1.186' highlighted in red. To the right of the table is a 'Modify Network Parameters' sidebar with various input fields and checkboxes.

ID	Device Type	Status	IPv4 Address	Port	Enhanced SDE Service Port	Software Version	IPv4 Gateway	HTTP Port
001	DS-PHA64-P2	Active	192.168.1.186	8000	N/A	V1.2.0build.2006...	192.168.1.1	80

Modify Network Parameters

- Enable DHCP
- Enable Hik-Connect

Device Serial No: DS-PHA64-P220201107AAWRO03

IP Address: 192.168.1.186

Port: 8000

Subnet Mask: 255.255.0.0

Gateway: 192.168.1.1

IPv6 Address: ::

IPv6 Gateway: ::

IPv6 Prefix Length: 0

HTTP Port: 80

Security Verification

Administrator Password: [input field]

Modify

[Forget Password](#)